

PENKO Engineering B.V. When Weighing Counts

FLEX Multi Channel Extended



SPECIFICATIONS FLEX Multi Channel

For each individual weighing channel (channel 1-4)

Wiring	Full Wheatstone bridge with passive connections (6-wire system)
Sense system	Passive sense system
Excitation voltage	5VDC
Minimum bridge resistance	87Ω @ 5V excitation
Maximum bridge resistance	1245Ω @ 5V excitation
Number of load cells	1 channel 1 - 4 load cells 350Ω @ 5V excitation
	1 - 11 load cells 1000Ω @ 5V excitation
Sensitivity	Certified: 0.4μV minimum voltage for verification scale @ 5V excitation
	Non-certified: 0.1μV - 0.5μV @ 5V excitation
Selectable ranges	1, 1.5, 2, 2.5, 3mV/V
Input voltage unipolar @3mV/V	-1mV to 16mV
Input voltage bipolar @3mV/V	-16mV to 16mV
A/D conversion speed	1600 measurements per second
Internal resolution	24 bits
A/D converter type	Sigma-Delta, ratio metric, isolated from digital
Non linearity	< 0.005% of reading
Offset drift	< +/- 2 ppm/°C
Span drift	< +/- 2 ppm/°C
Display resolution	100,000 divisions max. (certified with 10,000 divisions)
Display step	x1, x2, x5, x10, x 20 x50, x100, x200
Decimal comma	Selectable between any digits of the display value
Digital filter	High performance digital filters 1-10Hz
Overall filter	0 to -48dB

PENKO Engineering B.V. When Weighing Counts

FLEX Multi Channel Extended

Calibration methods	Dead load and span with up to 8 point linearization
	Millivolt calibration
	G - CAL (Gravity correction)
Measurement functions	Automatic zero tracking, motion detection, zero, tare, preset tare, net mode, peak hold, valley hold, bar graphs, multi range, multi interval
Memory allocation	Calibration data flash, dynamic data in SRAM with battery backup
Real-time clock	Standard with rechargeable Lithium battery backup
Display methods	Each channel separate Total weight of selected channels
SCREEN	
Display type	High resolution TFT LCD 640 x 480 pixels, 256 colors, high brightness 500cd/m ² , high contrast 350:1
Display functions	Completely menu driven with graphical user interface
Display rate	Selectable 1, 2, 3, 5, 10 or 25 updates/s
Display filter	0, -6, -12, -18, -24, -30, -36, -42, -48dB
Display filter range	Selectable in any range of the display value
Display suppression	Selectable in any range of the display value
Status enunciators	Zero, Net, No motion, Bar graph, I/O status
Display digits	6 digits with leading zero suppression, selectable height; 9 or 18mm
Display operation	Operate, configure and calibrate via: - Front panel (touch screen) - RS232 - Ethernet - USB
Touch screen	Glass screen, 2mm of resistive type
Display size	5.7 inch (145mm)
Display material	Front foil PET 175 μ
ENVIRONMENTAL	
Operating temperature	-10°C to +40°C [14°F to 104°F]
Storage temperature	-20°C to +70°C [-4°F to 158°F]
Relative humidity	Max. 85% non-condensing



PENKO Engineering B.V. When Weighing Counts


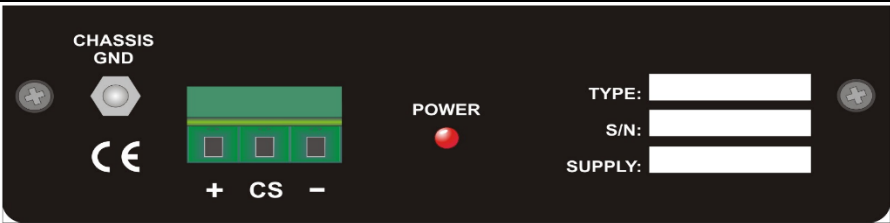
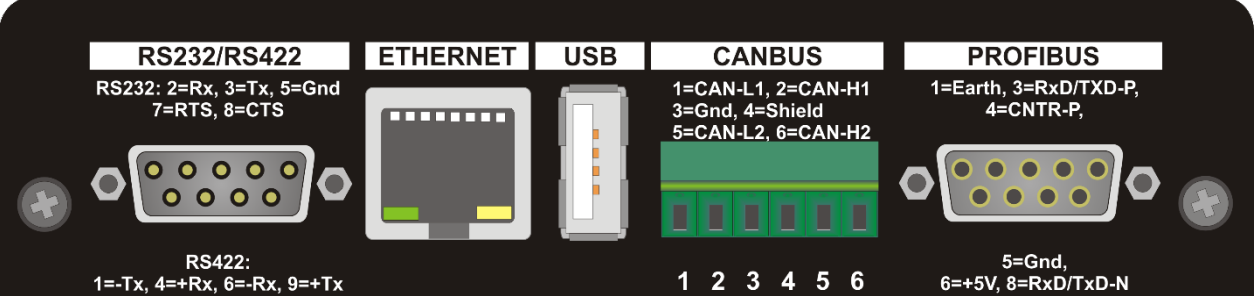
FLEX Multi Channel Extended

APPROVALS	
OIML R76	10,000d single or multi interval at $\geq 0,4\mu\text{V}$ scale interval
EU-type approval number	
MID certified	
OIML R51	Automatic catchweigher/checkweigher instrument
OIML R61	Automatic gravimetric filling instrument
OIML R106	Automatic rail weigh bridge
OIML R107	Discontinuous totalizer
EU-type approval number	TC7753
ENCLOSURE	
Material	Housing: extruded aluminum, black powder coating Front: machined aluminum, black anodized
Dimensions front (w*h*d)	170 x 150 x 5mm
Dimensions housing (w*h*d)	137.5 x 137.5 x 119mm
- panel cut out (w*h)	138.5 x 138.5mm
Weight without option boards	1700g
- option board 4 AI, 4 AO	120g
- option board 8 DI, 16 DO	75g
- option board 16 DI, 8 DO	75g
Mounting clips	2 mounting clips
Rubber seal	O-ring of mosrubber
Protection class	IP45 (or IP65 when built into a cabinet)



PENKO Engineering B.V. When Weighing Counts

FLEX Multi Channel Extended

ELECTRICAL OPTIONS	
	
AC power supply	100 - 240VAC 50/60Hz 20W max.
	
DC power supply	18 - 32VDC (24VDC type) 20W max.
STANDARD COMMUNICATION PORTS	
	
RS232 /RS422	Plain text/ASCII printer, Zebra ZPL protocol, PENKO ASCII, PENKO NPV slave and master, PENKO TP slave and master, Modbus RTU and ASCII, Hostlink Viewteq and PLC
Ethernet	PENKO TP protocol, plain text/ASCII printer, Zebra ZPL protocol, Modbus TCP, EtherNet/IP, Omron Fins, PENKO Buslink, PENKO Web interface
USB	Reporter, PENKO ASCII, TP slave Host functionality for USB storage (FAT16) or HID class keyboard or mouse
CANBUS	PENKO Buslink
OPTIONAL COMMUNICATION PORTS	
PROFIBUS	DP Slave



PENKO Engineering B.V. When Weighing Counts

FLEX Multi Channel Extended

COMMUNICATION SOFTWARE	
Pi Mach II	PENKO configuration, update and backup/restore software (free)
PDI Client	PENKO configuration software (free)
Profibus	GSD file
EtherNet/IP	EDS file
STANDARD DI & DO AND LOAD CELL INTERFACE	
<p>The diagram shows a terminal block with 20 pins. The first 8 pins are labeled 'INPUTS' (1-8) and the last pin is 'C'. The next 4 pins are labeled 'OUTPUTS' (1-4) and the last is 'C'. The next 4 pins are labeled 'OUTPUTS' (5-8) and the last is 'C'. The final 4 pins are labeled 'OUTPUTS' (9-12) and the last is 'C'. The last 4 pins are labeled 'OUTPUTS' (13-16) and the last is 'C'.</p>	
<p>The diagram shows four channel configurations for a 15-pin connector. Channel 1&2 uses pins 8, 1, 15, and 9. Channel 1&3 uses pins 1 (+Vexc), 2 (+Sense), 3 (-Vexc), 4 (-Sense), 5 (+In), and 6 (-In). Channel 2&4 uses pins 9 (+Vexc), 10 (+Sense), 11 (-Vexc), 12 (-Sense), 13 (+In), and 14 (-In). Channel 3&4 uses pins 8, 1, 15, and 9.</p>	
8 digital inputs	Optical isolated, 1 common, 18-28VDC, PNP or NPN Input 1 to 4 normal or counter input. Before 2018: counter input <= 1kHz, on request 5kHz. Since 2018: counter input <= 5kHz @24Vdc with 50% duty cycle.
4 digital outputs (level contact)	Isolated PhotoMOS outputs, 1 common, max. 35VDC or VAC, 0.5A nominal, 1A Surge (thermal fuse 0.5A), PNP or NPN
OPTION BOARDS FOR 1 AVAILABLE SLOTS	
Option 1: FLEX 8DI16DO	
<p>The diagram shows a terminal block with 24 pins. The first 8 pins are labeled 'INPUTS' (1-8) and the last is 'C'. The next 4 pins are labeled 'OUTPUTS' (1-4) and the last is 'C'. The next 4 pins are labeled 'OUTPUTS' (5-8) and the last is 'C'. The final 8 pins are labeled 'OUTPUTS' (9-12) and the last is 'C'. The last 4 pins are labeled 'OUTPUTS' (13-16) and the last is 'C'.</p>	
8 digital inputs	Optical isolated, 1 common, 18-28VDC, PNP or NPN Input 1 to 4 normal or counter input <= 1kHz Before 2018: counter input <= 1kHz, on request 5kHz. Since 2018: counter input <= 5kHz @24Vdc with 50% duty cycle.
16 digital outputs (level contact)	Isolated PhotoMOS outputs, 4 commons, max. 35VDC or VAC, 0.5A nominal, 1A Surge (thermal fuse 0.5A), PNP or NPN

PENKO Engineering B.V. When Weighing Counts

FLEX Multi Channel Extended

Option 2: FLEX 16DI8DO	
16 digital inputs	Optical isolated, 2 common, 18-28VDC, PNP or NPN Input 1 to 4 normal or counter input Before 2018: counter input <= 1kHz, on request 5kHz. Since 2018: counter input <= 5kHz @24Vdc with 50% duty cycle.
8 digital outputs (level contact)	Isolated PhotoMOS outputs, 2 commons, max. 35VDC or VAC, 0.5A nominal, 1A Surge (thermal fuse 0.5A), PNP or NPN
Option 3: Analog I/O	
4 analog inputs	2 x isolated voltage input, 16bit, 0 - 10VDC 2 x isolated current input, 16bit, 0/4 - 20/24mA
4 analog outputs	Isolated current outputs, 16bit, 0/4 - 20/24mA
Option 4: PT100/DI/DO/USB	
2 PT100 inputs	PT100 inputs
8 digital inputs	Optical isolated, 1 common, 18-28VDC, PNP or NPN
8 digital outputs (level contact)	Isolated PhotoMOS outputs, 2 commons, max. 35VDC or VAC, 0.5A nominal, 1A Surge (thermal fuse 0.5A), PNP or NPN
USB	Reporter, PENKO ASCII, TP slave Host functionality for USB storage (FAT16) or HID class keyboard or mouse



About PENKO

At PENKO Engineering we specialize in weighing. Weighing is inherently chemically correct, independent of consistency, type or temperature of the raw material. This means that weighing any kind of material guarantees consistency and thus, it is essential to sustainable revenue generation in any industry. As a well-established and proven solution provider, we strive for the ultimate satisfaction of custom design and/or standard applications, increasing your efficiencies and saving you time, saving you money.

Whether we are weighing raw materials, components in batching, ingredients for mixing or dosing processes, - or weighing of static containers and silos, or - in-motion weighing of railway wagons or trucks, by whatever means required during a process, we are essentially forming vital linkages between processes and businesses, anywhere at any time. We design, develop and manufacture state of the art technologically advanced systems in accordance with your strategy and vision. From the initial design brief, we take a fresh approach and a holistic view of every project, managing, supporting and/or implementing your system every step of the way. Curious to know how we do it? www.penko.com

Certifications

PENKO sets high standards for its products and product performance which are tested, certified and approved by independent expert and government organizations to ensure they meet – and even – exceed metrology industry guidelines. A library of testing certificates is available for reference on:

http://penko.com/nl/publications_certificates.html

PENKO Professional Services

PENKO is committed to ensuring every system is installed, tested, programmed, commissioned and operational to client specifications. Our engineers, at our weighing center in Ede, Netherlands, as well as our distributors around the world, strive to solve most weighing-system issues within the same day. On a monthly basis PENKO offers free training classes to anyone interested in exploring modern, high-speed weighing instruments and solutions. Training sessions on request: www.penko.com/training



PENKO Alliances

PENKO's worldwide network: Australia, Brazil, China, Denmark, Germany, Egypt, Finland, France, India, Italy, Netherlands, Norway, Poland, Portugal, Slovakia, Spain, Syria, Turkey, United Kingdom, South Africa, Slovakia Sweden and Switzerland, Singapore.

A complete overview you will find on: www.penko.com/dealers

