


PENKO Engineering B.V.

Your Partner for Fully Engineered Factory Solutions



Manual:
SGM800 Supplement Mono Filler Controller

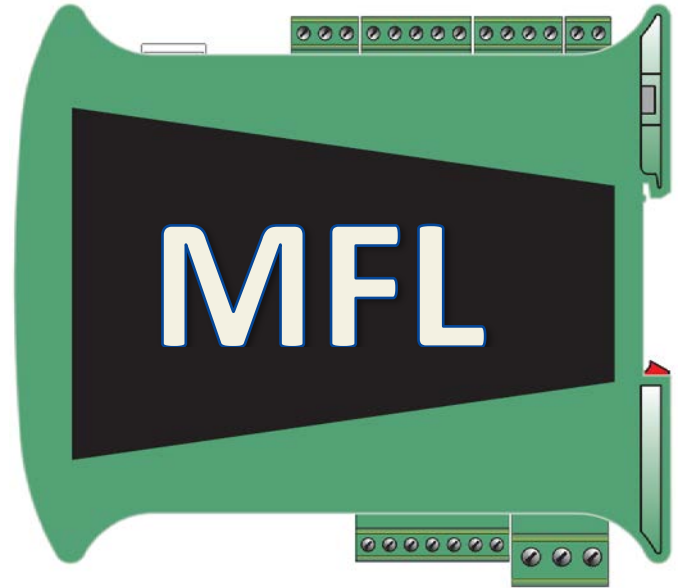

an ETC Company

SGM800 Mono Filler

Table of Contents

1	Introduction	3
2	Indication of display	4
3	Explanation of front keys	5
4	Configure and control	6
4.1	PENKO configuration software	6
4.2	Industrial protocols	7
5	Parameters.....	8
5.1	Configuration parameters	8
5.2	Recipe parameters.....	11
5.3	Live process parameters.....	13
6	Inputs and outputs	14
6.1	Inputs.....	14
6.2	Outputs.....	14
7	Printer Ticket.....	15
8	Program basics	16
8.1	Out dosing.....	16
8.2	In dosing with release valve.....	16
8.3	In dosing without release valve	17
9	Default settings	19

SGM800 Mono Filler

1 Introduction

This manual is applicable for the following Mono Filler devices:

- SGM820 Ethernet MFL
- SGM830 CAN MFL
- SGM840 Profibus MFL
- SGM850 Serial MFL
- SGM860 Profinet MFL

To configure and control the Mono Filler, the following options are available:

Full control:

- PENKO Pi Mach II software
- PENKO PDI Client software
- Modbus protocol
- Profibus protocol
- EtherNet/IP protocol
- ASCII protocol
- Profinet protocol

Basic control:

- Fins protocol*
- PENKO TP protocol*

** Register functions not available*

Note:

This manual does not describe the basic functionality of the device. Consult the device manual for this.

SGM800 Mono Filler

2 Indication of display

The SGM with closed cover:



- | | | | |
|----|----------------|---|---------------------|
| 1 | Weigher stable | 4 | Output active 1 - 4 |
| 2* | Zero active | 5 | Weigher value |
| 3* | Tare active | | |

* When the mono filler program is active, LED 2 and 3 are blinking

The SGM with open cover:



- | | | | | | |
|---|---------------------|-------------------|---|---------------------|-------------------|
| 1 | key 1 press <2sec.= | 1
SHORT | 3 | key 3 press <2sec.= | 3
SHORT |
| | key 1 press >2sec.= | 1
LONG | | key 3 press >2sec.= | 3
LONG |
| 2 | key 2 press <2sec.= | 2
SHORT | | | |
| | key 2 press >2sec.= | 2
LONG | | | |

Function of these keys are described on the next page

SGM800 Mono Filler

3 Explanation of front keys

All keys have different functions depending on weighing, menu or program mode.



Pressing key 1 "short".

In Weighing mode: create a new zero level

In Menu mode: increase value by 1 or move up in menu

In running mode: disabled



Pressing key 1 "long".

In Weighing mode: reset zero level to the original zero level

In Menu mode: decrease value by 1 or move down in menu

In running mode: disabled



Pressing key 2 "short".

In Weighing mode: set/ reset tare and reset preset tare

In Menu mode: go into sub-menu or move cursor 1 position to the left

In running mode: disabled



Pressing key 2 "long".

In Weighing mode: set preset tare

In Menu mode: move cursor 1 position to the right

In running mode: disabled



Pressing key 3 "short".

In Weighing mode: enter menu

In Menu mode: escape move back in menu without saving changes

In running mode: disabled



Pressing key 3 "long".

In Weighing mode: enter configuration menu

In Menu mode: Confirm made changes

In running mode: disabled

Menu will jump back one level every 30 seconds of inactivity

SGM800 Mono Filler

4 Configure and control

To configure and control the Mono Filler, the following options are available:

- PENKO configuration software
- Industrial protocols

4.1 PENKO configuration software

PENKO Pi Mach II and PENKO PDI Client can be downloaded from www.penko.com



USB driver and user manual are included in the download

Pi Mach II supports USB and Ethernet connection. PDI Client is USB only.

Consult the manuals on how to install and connect to the device.

In the tree structure of the device, the configuration parameters are found at:

PENKO - Device root - SGM800 - System Setup - Configuration

Configuration parameters

	Dosing	In	Release Valve	No
	Weighing	Net	Empty Level	0,00 kg
	Stability	Stable	Empty Time	0,00 s
	H-Time	0,00 s	Recipe	Local
	K.E.B.Time	0,00 s	Online Ticket	No
	Inflight	0 %	Use Alibi Memory	No
	Max Inflight Corr	10,000 kg	Coarse Delay	0,00 s
	Turnover Correction	0 %	Fine Delay	0,00 s
	Fine Time	0,00 s	Start Delay	0,00 s
	Tolerance	No	Start Level	No
	Tolerance Interval	0,00 s	Auto Start	No
	Display Hold	0,00 s		

The parameters are explained in [chapters 5](#)

SGM800 Mono Filler

In the tree structure of the device, the recipe parameters are found at:

PENKO - Device root - SGM800 - Recipe

Recipe parameters

The image shows a configuration tree on the left and a list of parameters on the right. The tree structure is as follows:

- PENKO
 - Device root
 - SGM820 Ethernet
 - 1.1.1.1 Name =
 - 1.1.1.2 Start Quick setup
 - 1.1.1.3 Enable Full setup
 - Live
 - System
 - System Setup
 - Service
 - Indicator
 - Communication
 - Digital inputs
 - Digital outputs
 - Analog output
 - Clock
 - Printer
 - Configuration
 - Factory recall
 - WELMEC
 - Recipe**
 - Control
 - Access

The parameters listed on the right are:

- Setpoint: 0,000 kg
- Turnover: 0,000 kg
- Inflight: 0,000 kg
- Min.Tolerance: 0,001 kg
- Max.Tolerance: 10,000 kg
- Coarse Speed: 0,00 %
- Fine Speed: 0,00 %
- Minimum Level: 0,000 kg
- Maximum Level: 0,000 kg
- Code: 0

The parameters are explained in [chapters 5](#)

4.2 Industrial protocols

The PENKO protocols Modbus, Profibus, EtherNet/IP and ASCII have a function set called register functions. These functions allow the user to configure and control the device.

Protocol descriptions can be downloaded from www.penko.com

Consult these on how to connect the device and use the register functions.

	SGM800	SGM810	SGM820	SGM840	SGM850	SGM860
Modbus TCP			✓			
Modbus SERIAL					✓	
Profibus				✓		
EtherNet/IP			✓			
ASCII TCP			✓			
ASCII SERIAL					✓	
Profinet IO						✓

Note: the FINS and PENKO TP protocol do not support register functions, only basic read and write operations for markers and registers.

SGM800 Mono Filler

5 Parameters

These parameters correspond with the parameters in the tree structure of the device configuration. When using the industrial protocol register functions, each parameter can be reached using its number.

Some parameters can be reached directly using ASCII, TP protocol, Modbus RTU, Modbus TCP, Fins, Profibus or EtherNet/IP. The parameters for Profibus or EtherNet/IP are prefixed with **PB** or **EIP**.

The Profinet config parameters can be found in the PENKO Profinet Protocol manual.

Note: when the device is rebooted or the configuration is manually changed, all configuration parameters are changed back to the value that were last set manually in the configuration.

5.1 Configuration parameters

No.	Name	Description
1	Dosing	Select the type of dosing. <ul style="list-style-type: none">In => positive dosing (in-dosing)Out => negative dosing (out-dosing)
2	Weighing	Select the type of weighing. <ul style="list-style-type: none">Net => the indicator is automatically set to zero before the dosing starts.Gross => the indicator is not set to zero before the dosing starts. The product will be added to the scale. <p><i>Δ Not used if out-dosing is selected. In that case weighing is always Net.</i></p>
3	Stability	Select the type of stability to determine the end value after dosing. This parameter works together with the H-Time parameter. <ul style="list-style-type: none">Stable => wait for StableH-Time => wait for H-TimeH-Time + Stable => wait for H-time then StableH-Time / Stable => wait for H-time or StableStable + H-Time => wait for Stable then H-time
4	H-time	The time the controller waits before determine the end value. The H-time works together with the stability parameter.

SGM800 Mono Filler

		<i>Δ Not used if Stability parameter is set to Stable</i>
5	K.E.B. time	Kinetic Energy Blind time is the time in which the kinetic energy disappears after coarse dosing turns off. The indicator value will not be read out by the program during this time. <i>Δ K.E.B. time must be less than the remaining Fine Time</i>
6	Inflight correction	The amount of product that falls on/into the weigher after dosing is stopped. The correction value indicates the strength of the correction. 0% means fixed inflight.
7	Maximum inflight	The inflight correction is not able to correct more than the maximum inflight. If the calculated inflight is 0, the inflight will not be corrected.
8	Turnover correction	This correction will automatically correct the turnover value to reach the needed Fine Time. 0% means fixed turnover.
9	Fine time	This is the ideal fine time to reach a fast dosing cycle. <i>Δ The remaining fine time must be more than the K.E.B. time</i>
10	Tolerance	This checks if the dosed weight is within the tolerance. If the dosed weight is under the setpoint - min. tolerance, the fine output will turn on until the weight is correct. If the dosed weight is over the setpoint + max. tolerance, an alarm is given until it's accepted by input 2. The minimum and maximum tolerance can be set in the recipe.
11	Tolerance interval	The interval time of the fine output (On/Off) in case of a low tolerance. If the tolerance interval is 0, the fine output is on until the correct weight is reached.
12	Display hold	After the dosing is finished, the display hold time starts. The dosed value will be frozen for this time. When a new dosing starts before the display hold time is elapsed, the hold time will be cut off.
13	Release valve	Select if a release valve is used in the installation. <ul style="list-style-type: none"> • Yes => output 4 is used to activate the release valve • No => output 4 is used to activate the indicator alarm
14	Empty level	The value under which the weigher is seen as empty after release. <i>Δ Not used if no release valve is selected</i>
15	Empty time	The time it will take to close the release valve. The time will start when the empty level is reached.

SGM800 Mono Filler

		<i>Δ Not used if no release valve is selected</i>
16	Recipe	Select the used recipe. <ul style="list-style-type: none">• Local => use the recipe selected on the device• Remote => use the recipe from a remote device (e.g. PLC)
17	Online ticket	Select if a printer ticket must be generated after each filling.
18	Use alibi memory	Select if a result must be written to the internal alibi memory.
19	Coarse delay	The coarse delay time at the start of dosing.
20	Fine delay	The fine delay time at the start of dosing.
21	Start delay	The delay time before dosing.
22	Start level	Check the level of the weigher at the start of dosing. The level must be within the minimum and maximum level set in the recipe. <i>Δ Not used if out-dosing or release valve is selected</i>
23	Auto start	Automatically start dosing. <i>Δ Not used if out-dosing or release valve is selected or if start level is turned off</i>

SGM800 Mono Filler

5.2 Recipe parameters

These parameters correspond with the parameters in the tree structure of the device Recipe. When using the industrial protocol register functions, each parameter can be reached using its number.

Some parameters can be reached directly using ASCII, TP protocol, Modbus RTU, Modbus TCP, Fins, Profibus, Profinet or EtherNet/IP. The parameters for Profibus or EtherNet/IP are prefixed with **PB** or **EIP**.

Note: when the device is rebooted or the recipe is manually changed, all recipe parameters are changed back to the value that were last set manually in the recipe.

No.	Name	Description	Location
1	Setpoint	The amount of product that is wanted on/into or out of the weigher. The selection net or gross and in or out is made in the configuration menu.	PB-R85 EIP-R11
2	Turnover	Coarse dosing stops when the setpoint minus the turnover is reached. The dosing continues in fine mode. The correction strength is set in the configuration menu. <i>Δ The remaining fine time must be more than the K.E.B. time</i>	PB-R86 EIP-R12
3	Inflight	The amount of product that falls on/into the weigher after the fine output is switched off. This value can be automatically corrected using the inflight correction in the configuration menu.	PB-R87 EIP-R13
4	Minimum tolerance	The allowed tolerance of the end value under the setpoint. The fine output will stay on until the weight is within this range. <i>Δ Not used if no tolerance is selected</i>	
5	Maximum tolerance	The allowed tolerance of the end value above the setpoint. An alarm will be generated until the weight is accepted by input 2. <i>Δ Not used if no tolerance is selected</i>	
6	Coarse speed	During coarse dosing mode this value is used for the analog output.	
7	Fine speed	During fine dosing mode this value is used for the analog output.	

SGM800 Mono Filler

8	Minimum level	If start level is turned on in the configuration, the weight must be above this value to start dosing.	
9	Maximum level	If start level is turned on in the configuration, the weight must be below this value to start dosing.	
10	Code	Enter a Batch code for printing reports.	

Note: when using Ethernet IP, the four parameters can be changed using the Instance: 0x0378 (888) (Control out)

SGM800 Mono Filler

5.3 Live process parameters

When using the industrial protocol register functions, each parameter can be read using its number.

Example: to read the value of low level, Use the function code 701 and value 1.

No.	Name	Description
1	Setpoint	Get the setpoint value.
2	Turnover	Get the turnover value.
3	Subtotal std.dev	Get the standard deviation of the subtotal.
4	Subtotal average	Get the average value of the subtotal.
5	Subtotal (weight) ok	Get the weight of the accepted products of the subtotal.
6	Subtotal count ok	Get the number of accepted product of the subtotal.
7	Reserved	-
8	Reserved	-
9	Reserved	-
10	Total Std.dev	Get the standard deviation of the total batch.
11	Total average	Get the average value of the total batch.
12	Total (weight) ok	Get the weight of the accepted products of the total batch.
13	Total count ok	Get the number of accepted product of the total batch.
14	Reserved	-
15	Reserved	-
16	Reserved	-
17	Alibi number	Get the number of the Alibi record.

SGM800 Mono Filler

6 Inputs and outputs

The following inputs and outputs are used.

6.1 Inputs

Input	Name	Description	Profibus marker	EtherNet/IP marker
1	Start/Stop	Input must be high to run the program	969	433
2	Accept tolerance	Input to accept the dosing when the end value is out of tolerance.	970	434
3	Start dosing or start release	Input to start dosing or release (depends on the configuration parameters) when the ready output is ON.	971	435

6.2 Outputs

Output	Name	Description
1	Coarse	Output to enable coarse dosing. The output turns on when the dosing starts and will turn off when the setpoint minus the turnover value is reached.
2	Fine	Output to enable fine dosing. The output turns on when the dosing starts and will turn off when the setpoint minus the inflight value is reached. The output also turns on if the end value is under the tolerance.
3	Ready	Output to enable the ready output. The output turns on when dosing is not busy.
4	Release or Alarm	When a release valve is selected in the configuration, this output is used to activate the release valve. When no release valve is selected in the configuration, this output is used to activate the indicator alarm. This alarm can be reset by switching off input 1.
Analog out	Dosing speed	Dosing speed for coarse/fine filling will be available from 0,00% to 100,00%

SGM800 Mono Filler

7 Printer Ticket

Example of the SGM Printer recipe when 'Ticket' layout is selected.

Programmable header 1	
Programmable header 2	
Programmable header 3	
Programmable header 4	

DATE	07-10-11
TIME	05:57.13
RECIPE	001
TICKETS	100
DOSED	00000.00 kg

Programmable footer 1	
Programmable footer 2	

SGM800 Mono Filler

8 Program basics

This chapter describes a few basics of the Mono Filler program which can be used when starting the program for the first time.

8.1 Out dosing

Dosing out of the weigher:

- Start the program with input 1 (start/stop)
- A pulse on input 3 (start dosing) starts the dosing
 - Dosing starts and tare will be taken
 - Output 1 (coarse) and output 2 (fine) turn on
 - DAC is set to the coarse speed
- Turnover value is reached
 - Output 1 (coarse) turns off
 - DAC is set to fine speed
- Setpoint value is reached
 - Output 2 (fine) turns off
 - DAC is set to 0.00%
- Dosed weight within tolerance?
 - Output 3 (ready) turns on
 - Dosing is complete
- Dosed weight outside tolerance?
 - Option to pulse input 2 (accept tolerance) to accept
 - Output 3 (ready) turns on
 - Dosing is complete
- A pulse on input 3 (start dosing) starts a new dosing
- Turn off input 1 (start/stop) to stop the program

8.2 In dosing with release valve

Dosing into the weigher and using a release valve:

Note the setting of the Weighing parameter:

- If set to Net, a tare will be taken before every dosing
- If set to Gross, tare will not be taken



SGM800 Mono Filler

- Start the program with input 1 (start/stop)
 - Dosing starts (tare will be taken depending on weigher mode)
 - Output 1 (coarse) and output 2 (fine) turn on
 - DAC is set to the coarse speed
- Turnover value is reached
 - Output 1 (coarse) turns off
 - DAC is set to fine speed
- Setpoint value is reached
 - Output 2 (fine) turns off
 - DAC is set to 0.00%
- Dosed weight within tolerance?
 - Output 3 (ready) turns on
 - Dosing is complete
 - A pulse on input 3 (start release) activates output 4 (release)
- Dosed weight outside tolerance?
 - Option to pulse input 2 (accept tolerance) to accept
 - Output 3 (ready) turns on
 - Dosing is complete
 - A pulse on input 3 (start release) activates output 4 (release)
- When weight is below value of Empty Level parameter a new dosing starts
- Turn off input 1 (start/stop) to stop the program

8.3 In dosing without release valve

Dosing into the weigher without using a release valve:

Note the setting of the Weighing parameter:

- If set to Net, a tare will be taken before every dosing
- If set to Gross, tare will not be taken

- Start the program with input 1 (start/stop)
- A pulse on input 3 (start dosing) starts the dosing
 - Dosing starts (tare will be taken depending on weigher mode)
 - Output 1 (coarse) and output 2 (fine) turn on
 - DAC is set to the coarse speed

SGM800 Mono Filler

- Turnover value is reached
 - Output 1 (coarse) turns off
 - DAC is set to fine speed
- Setpoint value is reached
 - Output 2 (fine) turns off
 - DAC is set to 0.00%
- Dosed weight within tolerance?
 - Output 3 (ready) turns on
 - Dosing is complete
- Dosed weight outside tolerance?
 - Option to pulse input 2 (accept tolerance) to accept
 - Output 3 (ready) turns on
 - Dosing is complete
- A pulse on input 3 (start dosing) starts a new dosing
- Turn off input 1 (start/stop) to stop the program

SGM800 Mono Filler

9 Default settings

Configuration

Parameter	Out dosing	In dosing with release valve	In dosing without release valve
Dosing	Out	In	In
Weighing	Net	Net	Net
Stability	Stable + H-Time	Stable + H-Time	Stable + H-Time
H-Time	1.00 sec	1.00 sec	1.00 sec
K.E.B.Time	0.70 sec	0.70 sec	0.70 sec
Inflight	0 %	0 %	0 %
Max Inflight Correction	1.00 kg	1.00 kg	1.00 kg
Turnover Correction	10 %	10 %	10 %
Fine Time	1.00 sec	1.00 sec	1.00 sec
Tolerance	Yes	Yes	Yes
Tolerance Interval	1.00 sec	1.00 sec	1.00 sec
Display Hold	1.00 sec	1.00 sec	1.00 sec
Release Valve	Yes	Yes	No
Empty Level	0.50 kg	0.50 kg	0.50 kg
Empty Time	1.00 sec	1.00 sec	1.00 sec
Recipe	Local	Local	Local
Online Ticket	No	No	No
Use Alibi Memory	No	No	No
Coarse Delay	No	No	No
Fine Delay	No	No	No
Start Delay	No	No	No
Start Level	No	No	No
Auto Start	No	No	No

SGM800 Mono Filler

DAC

DAC setup	Setting
Indicator	Speed
Min	0.00%
Max	100.00%
Mode	4 – 20 mA

Weigher

Weigher	Setting
Unit Label	Kg
Step	1
Decimal point	0.00
Operation Mode	Industrial
Max Load	1000.00

Stable

Stable Condition	Setting
Range	0.10 kg
Time	0.50 sec

SGM800 Mono Filler

Filter

Filter Digital	Setting
Digital Filter	Dynamic App.
Cutoff Frequency	1.0 Hz
Frequency	10 Hz



SGM800 Mono Filler





About PENKO

At PENKO Engineering we specialize in weighing. Weighing is inherently chemically correct, independent of consistency, type or temperature of the raw material. This means that weighing any kind of material guarantees consistency and thus, it is essential to sustainable revenue generation in any industry. As a well-established and proven solution provider, we strive for the ultimate satisfaction of custom design and/or standard applications, increasing your efficiencies and saving you time, saving you money.

Whether we are weighing raw materials, components in batching, ingredients for mixing or dosing processes, - or weighing of static containers and silos, or - in-motion weighing of railway wagons or trucks, by whatever means required during a process, we are essentially forming vital linkages between processes and businesses, anywhere at any time. We design, develop and manufacture state of the art technologically advanced systems in accordance with your strategy and vision. From the initial design brief, we take a fresh approach and a holistic view of every project, managing, supporting and/or implementing your system every step of the way. Curious to know how we do it? www.penko.com

Certifications

PENKO sets high standards for its products and product performance which are tested, certified and approved by independent expert and government organizations to ensure they meet – and even – exceed metrology industry guidelines. A library of testing certificates is available for reference on:

www.penko.com/nl/publications_certificates.html

PENKO Professional Services

PENKO is committed to ensuring every system is installed, tested, programmed, commissioned and operational to client specification. Our engineers, at our weighing center in Ede, Netherlands, as well as our distributors around the world, strive to solve most weighing-system issues within the same day. On a monthly basis PENKO offers free training classes to anyone interested in exploring modern, high-speed weighing instruments and solutions. Training sessions on request. www.penko.com/training



PENKO Alliances

PENKO's worldwide network: Australia, Brazil, China, Denmark, Germany, Egypt, Finland, France, India, Italy, Netherlands, Norway, Poland, Portugal, Slovakia, Spain, Syria, Turkey, United Kingdom, South Africa, Slovakia, Sweden and Switzerland, Singapore.

A complete overview you will find on: www.penko.com/distributor

